

# LYNX M20

*User Manual V0.1.3-0(2025.4.28)*

## Statement

- This manual is the information asset owned by Hangzhou Yunshenchu Technology Co.,Ltd. (hereafter referred to as DEEP Robotics) and any reproduction of part or all of this manual is strictly prohibited without the permission of DEEP Robotics.
- This manual explains the basic components, transportation and storage, specific operations, exception handling, and technical specifications of "Lynx M20". Be sure to read and understand this manual carefully before operating the robot.
- Basic information on safe use is described in detail in the "Reading Tips", so be sure to read this part thoroughly to ensure proper use.
- The diagrams and photographs in this manual are representative examples and may differ in details from the product purchased.
- This manual may be modified as appropriate for product improvements, specification changes, etc.
- The contents of this manual do not exclude the possibility of misremembering or omission. If this manual is damaged or lost or if you have questions about the contents of this manual, please contact us promptly.
- Failure caused by unauthorized disassembly or modification of the product by the customer is not covered by our warranty, see "Service & Warranty" for details.

## Reading Tips

### Description of Symbol

Before use (installation, transportation, maintenance, inspection), please be sure to read and master this manual, and familiarize yourself with the equipment and safety matters before you start using it. The safety matters in this manual are divided into three kinds: "Caution", "Mandatory" and "Prohibition". Even the contents of "Caution" may have serious consequences depending on the situation, so any of these safety matters are extremely important and should be strictly observed.



#### **Caution**

Usage tips or operational recommendations. Improper using or operating the robot may cause damage to it.



#### **Mandatory**

Matters that must be observed.



#### **Prohibition**

Matters prohibited. Misoperation is dangerous and may cause injury to operators or damage to the robot.

### Get Help

For more resources to assist you in using Lynx M20 proficiently, you can also visit DEEP Robotics' corporate website: <http://www.deeprobotics.cn>.

## Important Safety Tips



Before starting the robot, please ensure that all people and objects present are more than 2 meters away from the robot to avoid collisions.



- When the robot passes through stairs or slopes, do not stand on the stairs, platforms, or slopes below the robot to avoid personal injury when it falls.
- When the robot swaying legs, shaking violently or other abnormal phenomena occur in use, press **[STOP]** button on the controller to activate the soft emergency stop protection, so that the moving robot enters a protective state. The robot will automatically get down. After identifying the problem, cancel Emergency STOP to operate the robot normally.


# Content

<b>Statement</b>	<b>3</b>	2.5 Power Off	16
<b>Reading Tips</b>	<b>3</b>	2.6 Payload	17
Description of Symbol	3	<b>3 Precautions</b>	<b>18</b>
Get Help	3	3.1 Work Environment	18
<b>Important Safety Tips</b>	<b>4</b>	3.2 Battery	18
<b>1 Introduction</b>	<b>6</b>	3.3 Other Precautions	20
1.1 Overview	6	<b>4 FAQs</b>	<b>21</b>
1.2 Product List	6	<b>5 Transport &amp; Storage</b>	<b>22</b>
1.3 Product Parts	7	5.1 Transportation	22
1.4 Main Specifications	8	5.2 Storage	22
1.5 Description of Lighting	10	<b>6 Service &amp; Warranty</b>	<b>23</b>
1.5.1 Power	10	6.1 Warranty Policy	23
1.5.2 Battery	10	6.2 Warranty Coverage	23
1.5.3 Indicator light	11	6.3 Repair Instructions	24
1.6 Mode and Action	11	<b>7 Disposal</b>	<b>26</b>
<b>2 Operation</b>	<b>12</b>		
2.1 Preparation	12		
2.1.1 Environment	12		
2.1.2 Carrying	12		
2.1.3 Checking	12		
2.2 Charging	13		
2.3 Start	14		
2.3.1 Preparation	14		
2.3.2 Power on	14		
2.3.3 Connection	15		
2.4 Emergency Operation	15		
2.4.1 Soft Emergency Stop	15		
2.4.2 Hard Emergency Stop	15		
2.4.3 Overtemperature	15		
2.4.4 Low Battery	15		
2.4.5 Other Circumstances	16		


# 1 Introduction

## 1.1 Overview


Lynx M20 is a wheeled quadruped robot with 4 motors on each leg, a total of 16 degrees of freedom (DOF), and a variety of movement methods. The robot is equipped with 2 wide-angle cameras, 2 laser radars, and 2 industrial-grade high-performance hosts for motion control and environmental perception calculation.

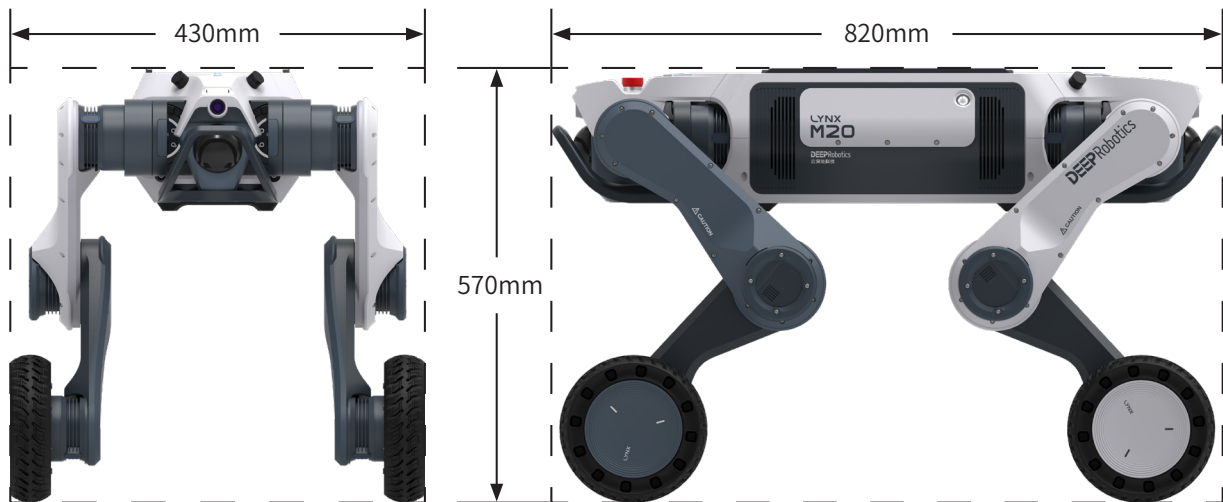


## 1.2 Product List

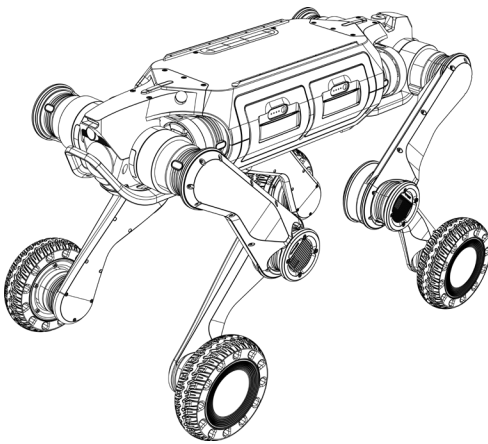


Robot ×1  
(without battery)




Controller ×1




Repalceable Battery ×2



Charging Hub ×1



Transport Case ×1



Warranty Card ×1



User Manual ×1





Certificate ×1



Cable Kit ×1

## 1.3 Product Parts

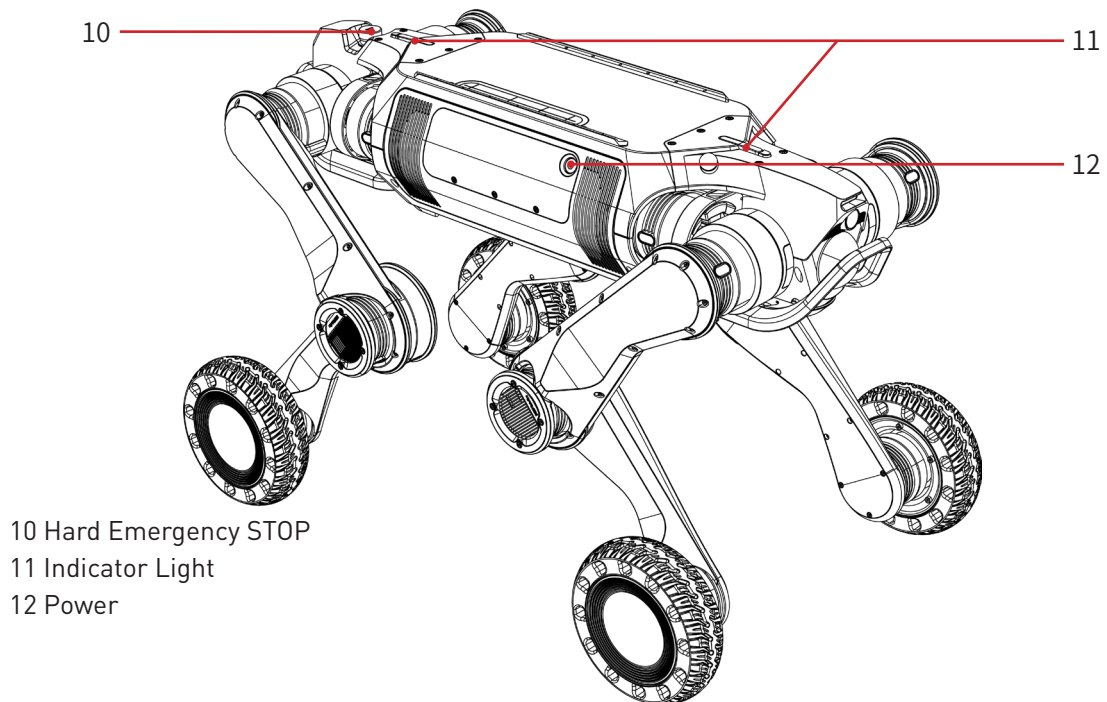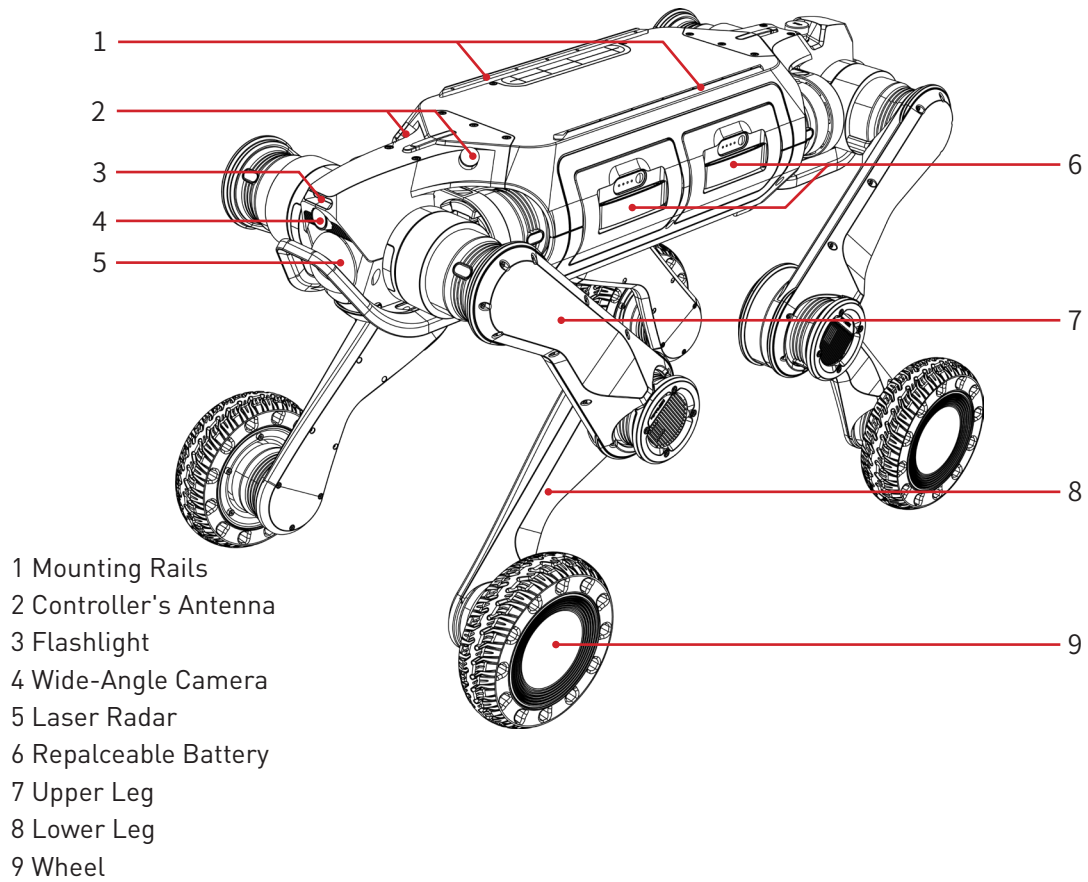

## 1.4 Main Specifications

Robot Dimensions	
Standing Size (Length × Width × Height)	820mm×430mm×570mm
Sitting Size (Length × Width × Height)	820mm×600mm×185mm
Tyre Size	7 inches
Weight	35kg
Electric Parameters	
Battery Capacity	4.5Ah (Each battery,Ideal data in an environment at 25°C )
Nominal Battery Voltage	72V
Charger Input Voltage	100V~240V
Charger Output	84/4A (for single battery)
Charging Time	1.5h~2h (Each battery, Supports simultaneous charging of dual batteries)
Power Supply	72V
Communication Interface	Ethernet; WiFi
Locomotion Parameters	
Maximum Speed	5.0m/s (Data from extreme test)
Maximum Working Speed	2.0m/s
Maximum Slope	±45°(Varies depending on flooring material)
Maximun Continuous Stair Height	25cm
Maximun Continuous Stair Slope	±45°
Maximum Climbable Single Step Height	80cm
No-load Runtime	3h (Dual battery powered)
Payload	12kg
Payload Runtime	2.5h (Dual battery powered)
Maximum Payload	50kg (Data from extreme test)

Sensor Parameters	
Laser Radar	×2
Wide-angle Camera	×2
Flashlight	×2


Other	
Ingress Protection	IP66
Operating Temperature	-20°C ~55°C

※ Data above are measured under ideal conditions and dual battery powered mode, the actual results may be biased.




## 1.5 Description of Lighting

### 1.5.1 Power

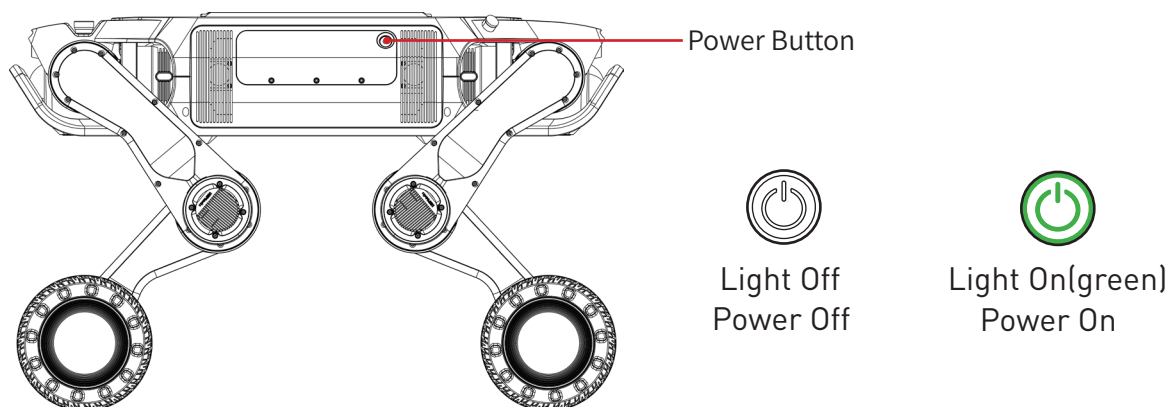

### 1.5.2 Battery

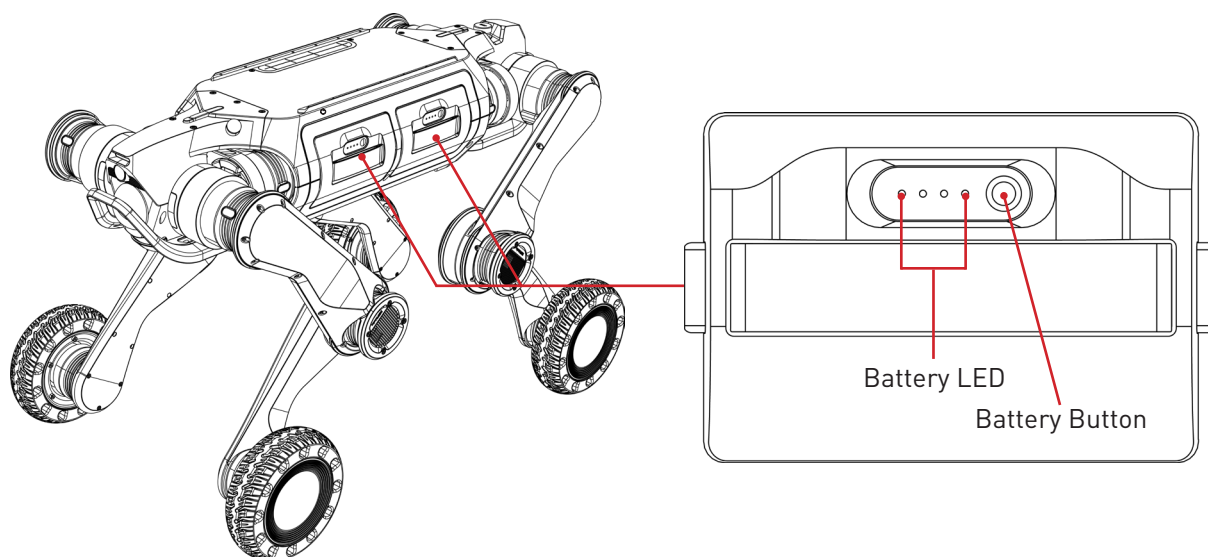

<div> <div>○ OFF</div> <div>● ON</div> <div>☼ FLASHING</div> <div>⋯ MOVING</div> </div>			
Status		Meaning	
● ● ● ●	Four lights on	Power>75%	
● ● ● ○	Three lights on	50%<Power<75%	
● ● ○ ○	Two lights on	25%<Power<50%	
● ○ ○ ○	One light on	10%<Power<25%	
☼ ☼ ☼ ☼	Four flashing lights	3%<Power<10%	
☼ ○ ○ ○	One light flashing slowly	Power<3%	
⋯ ● ● ● ●	Moving light,light on in turn	Charging,lights show % charge	

### 1.5.3 Indicator light

There is an indicator light on the front and back of the robot's back. The meaning of the indicator light is shown below:

#### When only one indicator light is on:

Light Status	Robot Status and Meaning
White lights on	The robot is in Basic motion mode
White high-speed breathing light	The robot is in Parkour motion mode

※Two indicator lights correspond to the head and tail directions respectively, and the illuminated light indicates the forward direction of the robot's movement.

#### When two indicator lights are on:

Light Status	Robot Status and Meaning
White moving lights	The robot are waiting for the APP to connect or connecting
White lights on	Connected, and the robot is sitting
Yellow flashing lights	Disconnecton, connection between robot and APP was broken
	Risk of robot collision with surrounding obstacles detected
Yellow lights on	The robot is in hard emergency stop protection state.
	Continuous abnormal warning, you can view the specific abnormal warning information on the controller
Red lights on	Continuous abnormal protection, you can view the specific abnormal protection information on the controller


## 1.6 Mode and Action

Motion Mode	
Basic	This mode allows the robot to pass through regular structured terrain such as continuously climbing 25cm stairs, going up and down $\pm 45^\circ$ slopes, and crossing piles of rocks.
Parkour	In this mode, the robot can perform actions such as High-Speed, Stand Upright, Handstand, etc on flat ground, and supports joystick control.

## 2 Operation


### 2.1 Preparation


#### 2.1.1 Environment

	<ul style="list-style-type: none"> <li>• Please ensure that operators and non-operators present have read the manual carefully and understand the basic operating instructions and safety precautions.</li> <li>• Before start the robot, ensure that all people or objects present are more than 2 meters away from the robot to avoid collisions.</li> <li>• Please use the robot in an environment of -20°C ~55°C.</li> </ul>
---	--


#### 2.1.2 Carrying

Lynx M20 weights approximately 35kg and it is recommended that two people carry it: One person stands at the front of the robot, firmly gripping both the lower and upper legs on each side with both hands; another person stands at the rear of the robot and adopts the same method to assist in completing the carrying task.

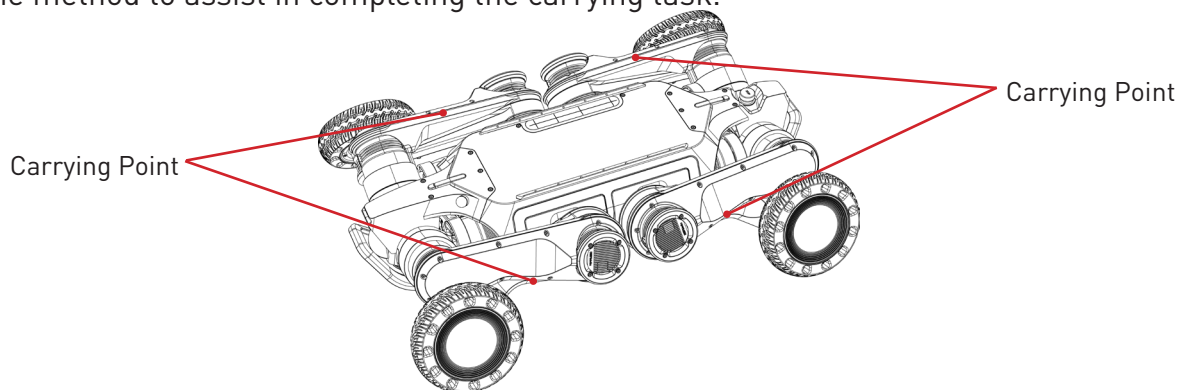

	<ul style="list-style-type: none"> <li>• Power off Lynx M20 and carry it gently.</li> <li>• Keep your hands away from easy pinch points and the range of motion of joints prevent pinching or scratching.</li> <li>• The metal components of the robot's legs that have just finished running are hot, so please wait until it cools down to suitable temperature before carrying.</li> </ul>
---	---

#### 2.1.3 Checking

	<ul style="list-style-type: none"> <li>• Press the power button once to check the battery. It is suggested to start the robot when both batteries are installed.</li> <li>• Make sure the controller is fully charged.</li> <li>• Make sure there is no visible damage to the exterior of the robot.</li> <li>• Make sure the emergency stop button can be triggered.</li> </ul>
---	--




If the robot parts are aging or damaged, please do not start the robot and contact the after-sales staff in time.

## 2.2 Charging


Lynx M20 is powered by dual batteries, supports the replacement of any of these batteries while the robot is powered on. User can insert the battery into the Charging Hub for charging.

1. First, make the robot lie down, then lift the front/rear legs appropriately to ensure that the front/rear battery can be taken out smoothly. Hold the battery strap and pull it outward with appropriate force. The battery buckle will be unlocked by force, and then the battery can be removed from battery bin.

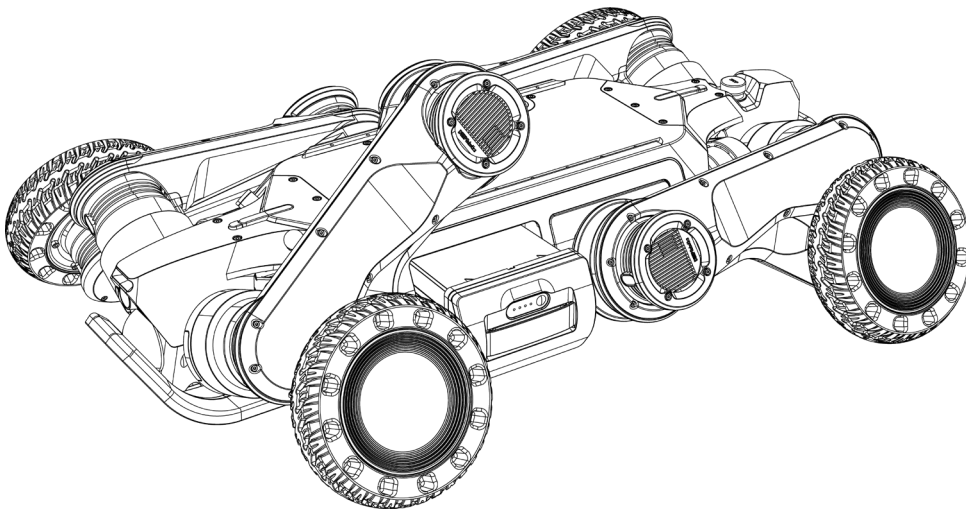

- It is recommended charge in an environment of 0°C ~45°C.
- During charging, please always pay attention to the battery and charger to prevent accidents, and disconnect the charging power in time after charging is completed.

2. Insert the battery into the Charging Hub(battery power button side facing inwards), then connect the Charging Hub to the mains (100V~240V). Then turn on the Charging Hub's switch for charging.

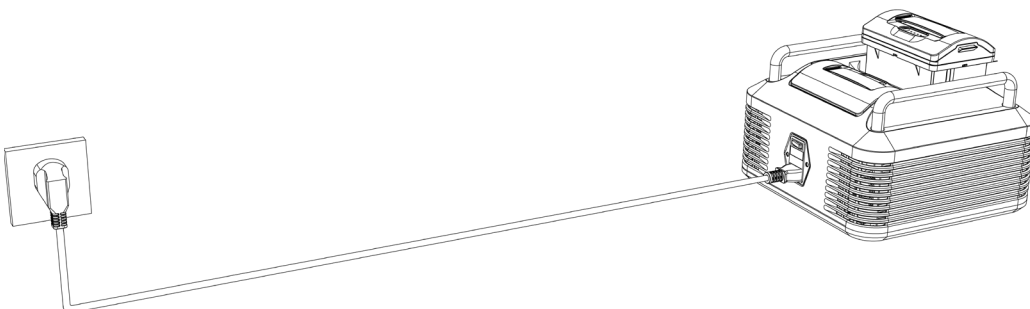


3. When charging, the battery LED lights will in a moving state and light on in turn, the number of lights on corresponds to the power already charged.
4. After finishing charging, the four battery LED lights off and the Charging Hub's light will turn green.

## 2.3 Start

### 2.3.1 Preparation

1. First, take the robot from the transport case and place it on a flat surface, as described in the section "2.1.2 Carrying".
2. When installing the front battery, lift the front legs appropriately to ensure that the battery can be inserted smoothly. When inserting the battery, it is necessary to place the battery forward into the battery bin (the battery LED and battery button above the battery strap). Pull the battery strap outward with one hand to unlock the battery buckle; lift the bottom of the battery slightly with the other hand and push it into the battery bin with appropriate force. Then loosen the battery strap, when the buckles on both sides of the battery strap are inserted into the battery bin, it indicates that the battery has been successfully installed. The rear side battery can be installed in the same way.
3. Adjust the robot pose as required (as shown in the picture below): Upper leg is tightly pressed against the lower leg, the lower leg and wheel naturally touch the ground.

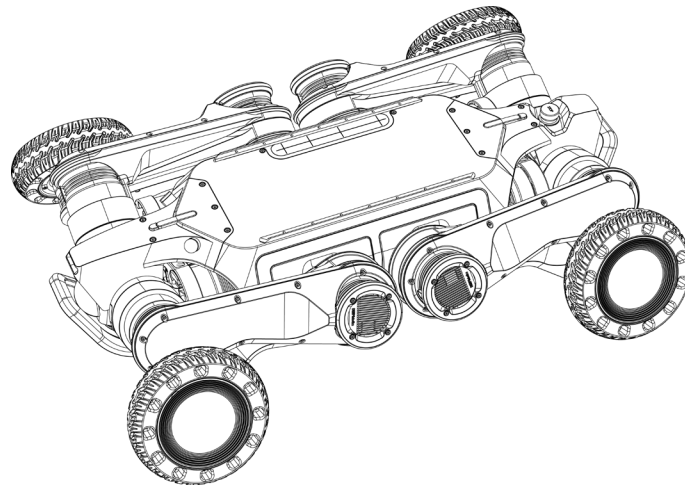

### 2.3.2 Power on

Before power on the robot, please confirm that the hard emergency STOP button has not been triggered. If the hard emergency STOP button is triggered, troubleshoot the robot first. After ensuring that the machine can be operated normally, rotate the button in the direction indicated by the arrow on the button to release the hard emergency stop.

With the hard emergency STOP button not triggered, press, then press and hold the battery button until the battery LED flashes and stays on, indicating that the battery is powered, and the battery LED light shows the current battery level. Press the power button on the right side of the robot to start the robot. At this time, the power button always lights up green.

### 2.3.3 Connection

Long press the power button to turn on the controller (please ensure that the controller has enough power before use). The robot and controller have been paired and bound. After opening the “DEEP Robotics” app, the controller will automatically connect to the robot it is bound to.

## 2.4 Emergency Operation

### 2.4.1 Soft Emergency Stop

If the robot's legs swing or shake violently and other abnormal phenomena occur during use, please start the soft emergency stop function on Controller to make the robot lie down. After troubleshooting, press the stand button again to operate the robot normally.

### 2.4.2 Hard Emergency Stop

Hard emergency stop button disables the joints power. Press the hard emergency stop button at the back rear of the robot, and the power button indicator light is off to indicate that the hard emergency stop has been triggered, which can avoid the robot from getting out of control. After troubleshooting the problem, if you need to release the hard emergency stop, please rotate the hard emergency stop button in the direction of the arrow on the button to release the hard emergency stop. If the hard emergency stop button pops up, it means that the hard emergency stop has been released. After the hard emergency stop is released, you need to restart the robot to restore normal usage.



Once the hard emergency stop is triggered, it will cause the robot to lose all kinetic energy and thus fall to the ground. There is a risk of damaging the ground or the robot, so it is strictly forbidden to press the hard stop emergency button during normal movement!

### 2.4.3 Overtemperature

The system comes with temperature sensing. Once the robot runs for a long time and causes the motor, driver, battery or CPU to overheat, it will automatically enter the overheat protection state, and the robot will automatically stop moving and lie down on the spot. Wait for the robot to cool down and exit the overheat protection state before continuing to operate the robot.

### 2.4.4 Low Battery

When the robot's battery is below 20%, it will enter a low battery warning state, and it should be charged immediately. When the battery level drops below 5%, the robot will trigger a low battery protection mode, where it will automatically lie down and will no longer respond to commands from the remote controller. Please replace the battery before continuing to use it.

## 2.4.5 Other Circumstances

- If the joints are still swinging after the robot falls down suddenly, wait 30 seconds after the robot joints have completely stopped moving before pressing the hard emergency stop button at the rear of the body.
- In case of a fire, do not use water to extinguish it. Please use foam fire extinguisher, dry powder fire extinguisher or carbon dioxide fire extinguisher nearby.
- If the soft emergency stop fails, robot smokes or is submerged in water, or other unexpected situations, please immediately power off the robot and wait until it's safe to identify the problem. Then please contact DEEP Robotics, and we will help to troubleshoot the problem and repair or change your robot. Pay attention to safety in use!
- If the robot falls, do not drag, push or flip it before triggering the hard emergency stop.

## 2.5 Power Off




Make sure that the robot is sitting before the following operations.

Press the robot power button, the power button pops up, the power light and indicator light go out, and the robot shuts down. Press, then press and hold the battery power button until the battery LED light flashes once. Then the battery indicator light goes out, indicating that the battery has stopped providing power and the shutdown is complete.

## 2.6 Payload

The robot supports payloads installation and development. Users can screw devices into the thread holes on the back of robot (unit: mm).

The installation range of the load is limited to the area where the mounting rail is located, and the height is limited to 30cm, that is, the available installation range is 270mm × 165mm × 300mm. It is recommended that the weight of the mounting devices should not exceed 15kg.

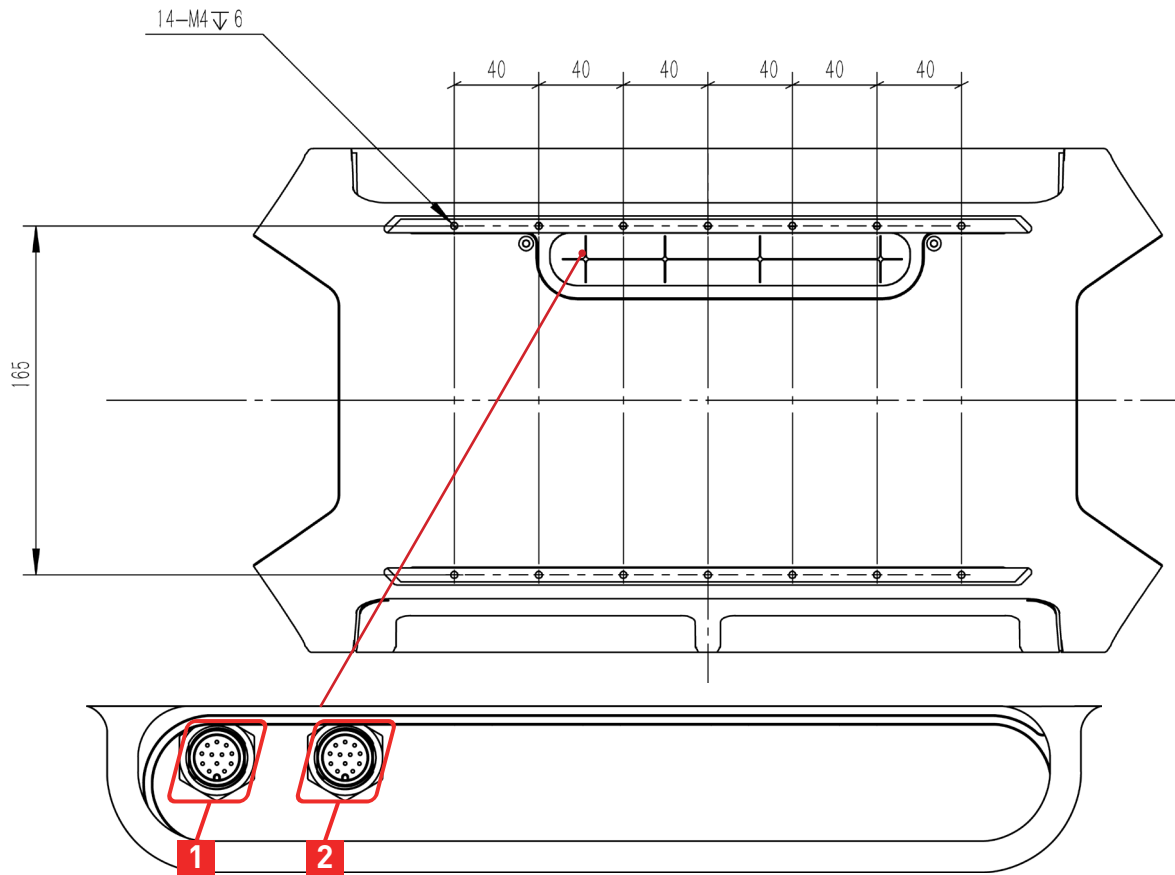

Interface	
① 72V	② LAN



- After payloading, the robot only supports the Basic motion mode, please do not use the Parkour motion mode after payloading.
- When mounting devices on the back of the robot, the robot's motion performance may be affected. Please be sure to consult the after-sales personnel before installing.
- The maximum power supplied by the robot to the payload is 360W.
- Please cover the aviation plug with its cover.



## 3 Precautions

### 3.1 Work Environment



- Do not operate the robot in environments with strong electromagnetic interference such as high-voltage cable, high-voltage transmission stations, base stations and television broadcasting towers, etc.
- Please do not operate the robot in environments with strong WiFi signal interference. Be sure to turn off all other WiFi signal source, and then use the joystick to operate the robot.
- Do not operate the robot in bad weather with fog, snow, lightning, sandstorms, windstorms, tornadoes, etc.
- Keep the robot in sight and keep it at least 2 meters away from people, water, open flames, etc at all times.
- Do not use robot on smooth surfaces such as ice, glass and tiles, If need to pass through smooth surfaces, please avoid violent movements to prevent the robot from slipping and falling.
- Do not run the robot on the edge of a high place to prevent it from falling from a height and causing damage.



The product has an IP66 protection rating, which can completely prevent dust from entering and can withstand powerful water jets without harmful water penetration. But it does not support immersion, as damage caused by liquid infiltration due to immersion is not covered by the warranty. If water splashes, please wipe off the water stains on the surface of the equipment after use and store it. If the robot falls into water or is submerged in liquid, please stop using immediately, wipe off surface water stains, and contact after-sales for support.

### 3.2 Battery



- Before using the battery, carefully read the instruction manual and battery labels on the surface.
- Need to use the original battery charger(Such as Official Charging Hub, etc).
- Do not drop or strike batteries. Do not place heavy objects on the batteries or charger.
- Never use the battery in a humid environment and never immerse it



in water or get it wet.

- When water is touched inside the battery, a decomposition reaction may occur, which may cause the battery to self-ignite or even explode. It is strictly forbidden to expose batteries to any liquid, never immerse them in water or get wet, and keep away from rain or wet environment. If the battery accidentally falls into water, immediately place the battery in a safe open area and keep it away from the battery until it is completely dry. Drying batteries should not be reused.
- Disassembly of batteries without authorization is prohibited. Once disassembled, no warranty is granted. Deep Robotics is not responsible for battery accidents caused by privately disassembling batteries.
- Do not short-circuit the battery positive and negative.
- If not in use for a long time, please remove the battery from the robot, store it separately and charge it to half-full charge, so as to avoid over-discharging of the battery, which may cause damage to the battery cell and make it impossible to continue to use.
- Press and hold the battery button for 20 seconds until the battery indicator light flashes 5 times to put the battery into Storage Mode.
- In the Storage Mode, the battery can be stored for a long time, and it does not respond to the press operation of the button and the battery indicator light is always off. Charging the battery to exit the Storage Mode.
- When the battery is left for more than 3 months, it should be recharged to 60% to keep the battery active.
- If battery exhibits overheating, leakage, unusual odors, deformation or other anomalies in use or during storage, please stop using it immediately and stay away from the battery, and contact after-sales for further processing.
- Please refer to the battery instructions for details.

### 3.3 Other Precautions



- When carrying the robot, pay attention to the anti-pinch label on the robot and do not put your hands into the position where the anti-pinch label is attached!
- Do not lift the robot while it is moving to avoid unintended movements that could cause damage to robot or injury to people!



- Please do not download other unrelated APPs in the controller.
- It is strictly forbidden to disassemble the robot personally. Once disassembled, the warranty will be invalid!

## 4 FAQs

**Q1: Is it normal for a robot to stop moving on its own?**

A: Probably some kind of abnormality caused the robot to trigger its own protection mechanism, you can check the specific operation tips through the controller's APP. If it continues to fail to return to normal or does not display the abnormal handling prompts, please contact the after-sales service.

**Q2: What if there is no response to the commands from APP after connected?**

A: First confirm if the hard emergency stop is off (the button lights green). If the APP is still unable to control the robot, please restart the robot.

**Q3: Can the robot continue to be used when its body or legs are askew after standing up?**

A: At this time, do not control the robot to move. Please immediately trigger soft emergency stop to make the robot lie down. Then shut down and restart to try to control the robot to stand up again. If still abnormal, please contact the after-sales staff.

**Q4: What if the robot falls down due to the loss of control of one of its legs?**

A: First click **[STOP]** button on the controller to make it down. Then restart the robot. If it does not return to normal after restarting, please contact after-sales staff.

**Q5: What if the video stream gets stuck after the robot falls?**

A: Restart the robot. If the video stream is still black, please contact after-sales staff.

**Q6: Is it normal that the battery LED lights are not lit after pressing the battery power button?**

A: It may be that the battery has entered Storage Mode. Please refer to "2.2 Charging" to charge the battery and then try to see if the battery can be used normally. If it still cannot be used, please contact after-sales service.

**Q7: What terrain can the robot adapt to?**

A: The robot can be applied to gently uneven ground such as flat land and grass, and can also climb complex terrain such as stairs and slopes, but please avoid operating and using the robot in extreme terrain (such as too smooth surfaces such as ice, sharp or undulating terrain, near high edges, etc.).

**Q8: What if encountering a problem that cannot be solved even after consulting this manual?**

A: Please contact the after-sales staff promptly for help.

## 5 Transport & Storage

### 5.1 Transportation

When transporting the Lynx M20, please use the transport case specifically designed for it.



Before shipping the robot with transport case, remove the batteries from the robot. And when shipping, make sure the front of the transport case is facing up.

### 5.2 Storage

- Lynx M20 requires a clean and dry storage environment of 0°C ~40°C .
- Robot power must be off, and if the robot will not be used for a long time, remove the batteries from the robot.
- Do not allow water or other liquids to drench the robot.
- It is strictly forbidden to place other objects within the joint rotation range.
- It is recommended to store Lynx M20 in the transport case specifically designed for it to protect it from shock and vibration.
- Lynx M20 must be placed in the transport case with its back facing up.
- For the precautions for battery storage, refer to the "3.2 Battery".

## 6 Service & Warranty

### 6.1 Warranty Policy

The warranty period for the major components of Lynx M20 is as below.

Component Name	Warranty Period
Joint Module, Replaceable Battery, Wide Angle Camera, Laser Rader, Control System, Other Electronic Components	One year

**Tip: Shell, tyre and other fragile parts, and transport case and other accessories are not covered by warranty. If necessary, please consult after-sales support.**

The warranty period starts from the date of receipt. Products or parts that meet the warranty period and the contents of the warranty will receive free after-sales service. If the product you purchased is beyond the warranty period, you can also get help from us by purchasing a separate service.

### 6.2 Warranty Coverage

Depending on the specific situation, we will repair or replace parts accordingly for the product you purchased. However, the following cases will not be covered by the free warranty, but you can still choose to have paid after-sales service, for which please consult the after-sales support for details.

- Damage caused by man-made non-product quality problems.
- Unauthorized modification, disassembly, shell opening, etc.
- Out of warranty.
- Damage caused by improper installation, use and operation (such as dropping, crushing, immersion, violent use, etc.) as required by the manual.
- Damage caused by use in excess of the safe weight capacity.
- Damage caused by self-repair or replacement of parts without official instructions.
- Damage caused by installing third-party products by yourself.
- Damage caused by the use of a non-original battery pack for power supply.
- Failure or damage due to force majeure factors such as typhoon, earthquake, fire, lightning strike, abnormal voltage.
- Damage caused by operating the robot in an environment with severe signal interference.
- Damage caused by improper handling of the robot on slippery surfaces such as glass and ice.
- Fallen damage caused by the use of a robot near a high edge.
- Fallen damage other than operate the robot on flat terrain.
- Damage caused by operation in environments such as sharp terrain and large undulations.

- Damage caused by forced operation of parts in the event of aging or damage.
- Damage caused by not keeping a safe distance when used in complex environments.
- There are obvious traces of dust, grit, water, and metal powder intrusion inside the robot.
- Damage caused by improper handling operations.
- Damage caused by violent or non-violent means applied to the robot when it exceeds its anti-interference limit.
- Due to operation errors, there are obvious marks of collision and scratches on the surface of the robot.

### 6.3 Repair Instructions

- Before getting after-sales service, please make sure to backup all data and delete important data to prevent data loss or leakage. DEEP Robotics is not responsible for the loss or leakage of any data contained in the product.
- When you obtain after-sales service from DEEP Robotics, you authorize DEEP Robotics to make any modification, delete data or restore factory settings for the purpose of after-sales service.
- Before sending it for repair, please contact after-sales support, DEEP Robotics will try to diagnose and solve your problem remotely.
- If the above methods cannot solve your problem, you can send it back to the robot for repair after verifying with after-sales support. You need to pay for the postage first when you send the product to DEEP Robotics. After DEEP Robotics receives the product in need of maintenance, the product will be tested to determine the problem and responsibility.
- If the problem is caused by defects in quality of the product itself, DEEP Robotics will be responsible for the testing fee, material fee, labor fee and the postage for sending back.
- If the product does not meet the conditions of free repair, you can choose to pay for repair, and the corresponding testing fee, material fee, labor fee and the postage for sending back will be paid by you. You can also choose not to repair and to send back the product, the corresponding postage and insurance fee will be paid by you.
- Considering environmental protection and safety, please do not send back seriously damaged batteries. If you have sent back, DEEP Robotics will scrap such batteries and will not return them back.
- If you provide an incorrect delivery address which results in non-delivery or rejection by the recipient, the adverse consequences and losses shall be afforded by you.
- To ensure your rights and interests, when you sign for the after-sale products sent by DEEP Robotics, please check carefully whether the products are intact. If there is any abnormality, please immediately take video or photos on the spot and contact DEEP Robotics to get the solution. If there are unresolved after-sale problems, please also contact DEEP Robotics immediately, otherwise it is regarded as the end of this after-sale

service without dispute.

- ※The final interpretation of these after-sales terms and conditions belongs to DEEP Robotics.
- ※Please contact us if you have any questions before obtaining after-sales service.
- ※These after-sales terms and conditions are only used in Chinese mainland, and the after-sales policies of other countries or regions are subject to local laws.



## 7 Disposal

- The disposal of waste robots and parts shall be carried out in accordance with the corresponding national laws and regulations on the recycling of waste electrical and electronic products.
- In particular, the use or disposal of lithium batteries contained in robots is subject to national laws and regulations governing the disposal of batteries.

# Generation ROBOTS

Brand of **NGX** ROBOTICS



+33 (0)5 56 39 37 05



contact@generationrobots.com



1 rue Pierre-Georges Latécoère 33700 Mérignac, France

[www.generationrobots.com](http://www.generationrobots.com)

