


NAO⁶

Datasheet

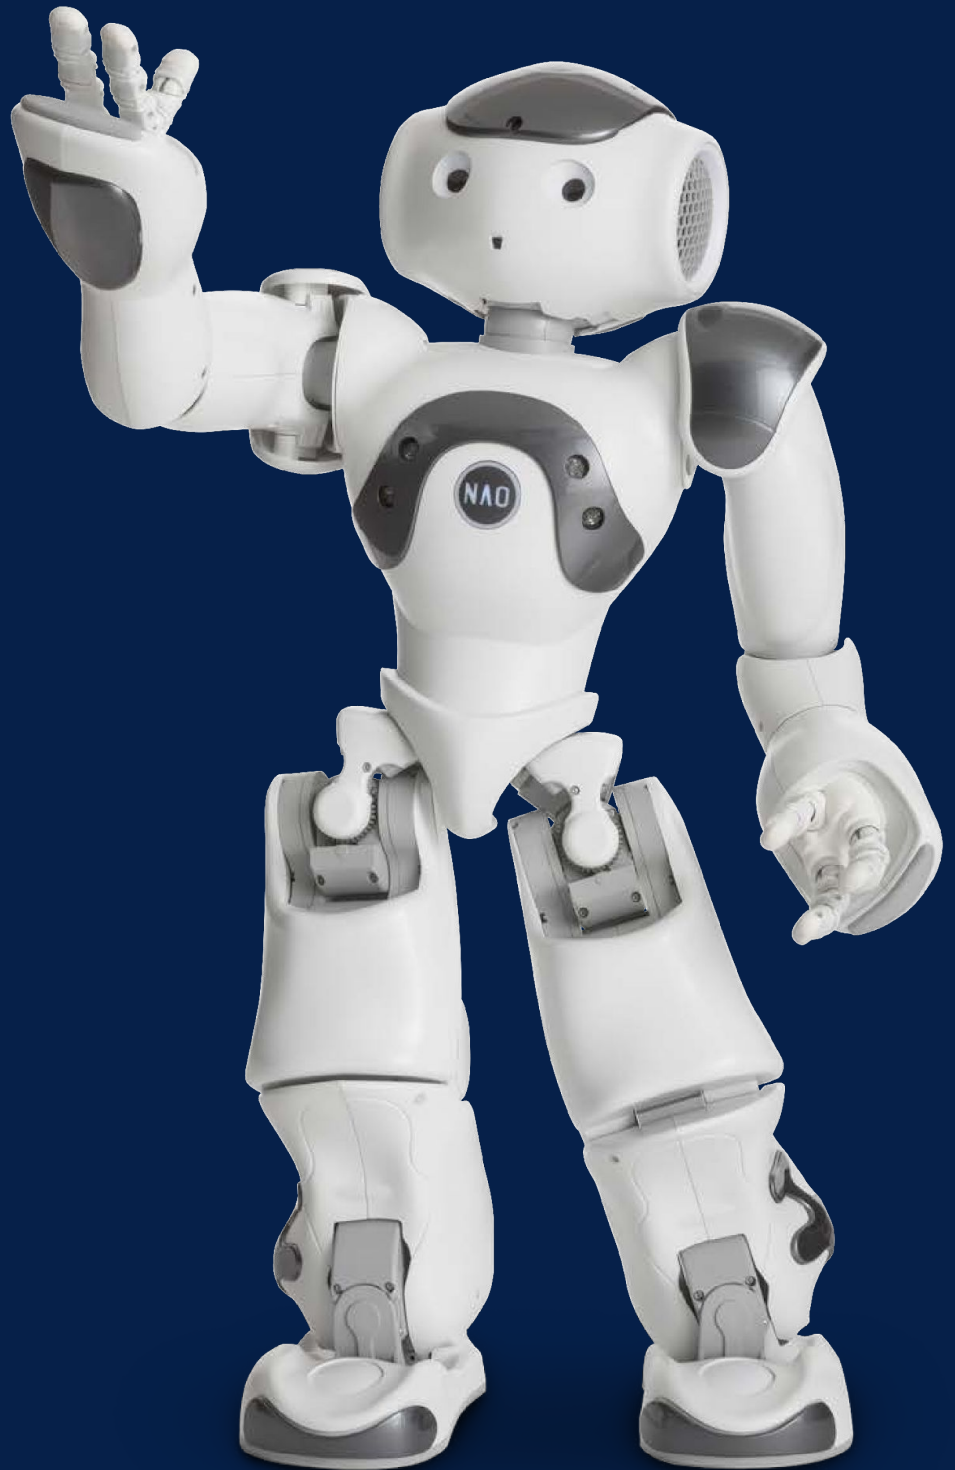



MODEL: H25600

PHYSICAL CHARACTERISTICS

GENERAL

Size 574x311x275 mm / 22.6x12.2x10.8 in (HxDxW)

Weight 5.48 kg / 12.08 lb

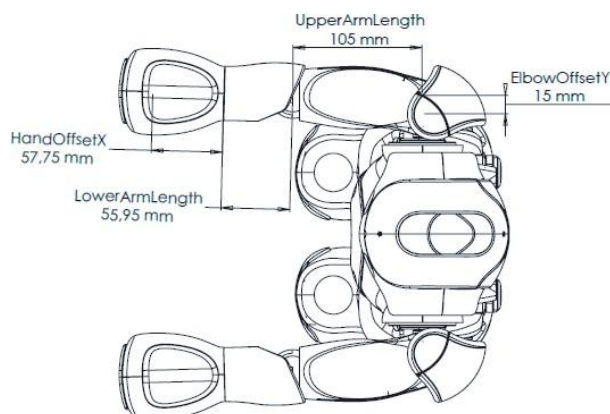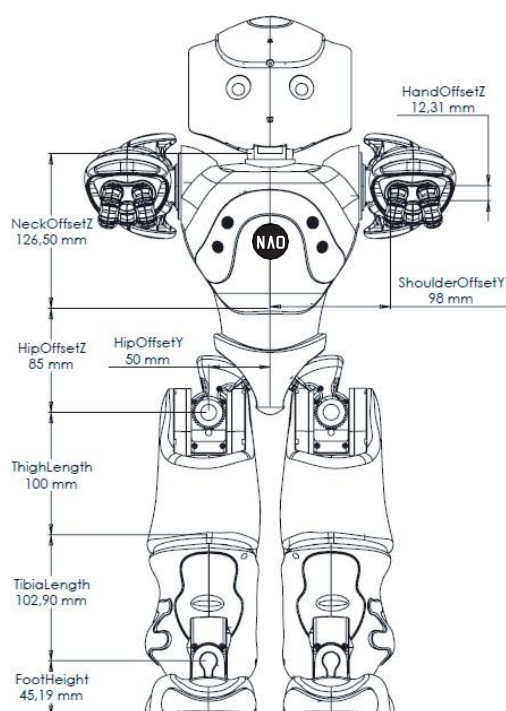

BRAIN SYSTEM

MOTHERBOARD

CPU	CPU processor	ATOM E3845
	Cache memory	2 MB
	Clock speed	1.91 GHz

RAM 4 GB DDR3

Flash 32 GB eMMC memory

HUMAN INTERACTION

LANGUAGES


Text to speech & Automatic speech Recognition	Czech, Danish, Dutch, English, Finnish, French, German, Italian, Japanese, Greek, Polish, European Portuguese, Brazilian Portuguese, Spanish, Swedish, Russian, Turkish, Arabic, Brazilian, Standard Mandarin, Taiwanese Mandarin, Norwegian.
---	---

AUDIO

Loud Speakers	Left & Right
	Diameter 40 mm
	Impedance 4 Ω
	Audio power 87 dB +/- 3 dB
	Freq range up to ~20 kHz
	Input 2 W

Microphones ×4 omnidirectional on the head

Sensitivity	-12dBV/PA @1KHZ
Frequency range	100HZ to 10KHZ

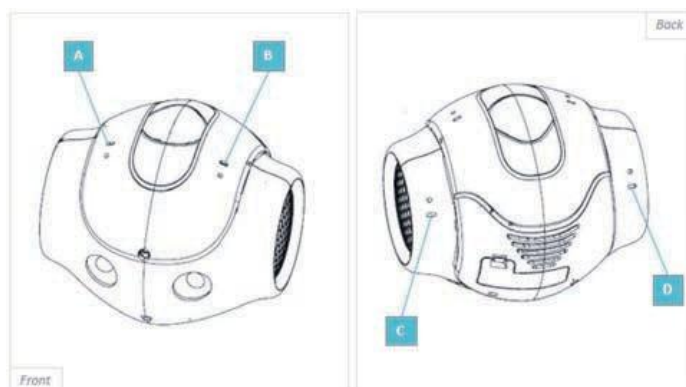

LEDS

Placement	Quantity	Description
Tactile Head	12	16 White levels
Eyes	2x8	RGB FullColor
Ears	2x10	16 Blue levels
Chest button	1	RGB FullColor
Feet	2x1	RGB FullColor



2D CAMERAS

Cameras	2 front of head	
Sensor model	OV5640	
Sensor type	SoC - CMOS Image Sensor	
Imaging array	Resolution	5 MP
	Size	1/4 in
	Active Pixels (HxV)	2592 x 1944
Sensitivity	Pixel size	1.4 x 1.4 μm
	Dynamic range	68 dB @8x gain
	Signal/Noise ratio (max)	36 dB
	Responsivity	600 mV/lux-sec
Output	Camera output	640 x 480 @30 fps
	Data Format	YUY & RGB
	Shutter type	Rolling Shutter/ frame exposure
View	Field of view	67.4° DFOV (56.3° HFOV, 43.7° VFOV)
	Focus range	10 cm ~ ∞ $\approx$ 4 in - ∞
	Focus type	Auto focus

FRAME RATES

Resolution	Top	Bottom Camera
320x240 px	@15, 30 fps	@15, 30 fps
640x480 px	@15, 30 fps	@15, 30 fps
1280x960 px	@15, 30 fps	@10, 15 fps
1920x1080 px	@15, 30 fps	-
2560x1920 px	@15 fps	-

Note: The rate of the video stream will depend on the network and the video resolution chosen. All frame rates depend on the CPU usage. Values are measured with a CPU fully dedicated to image gathering.

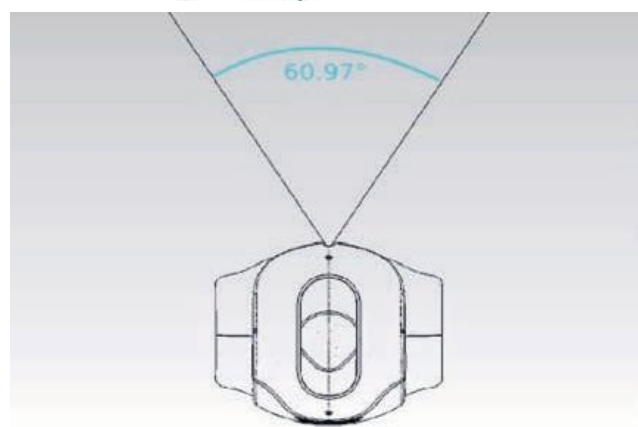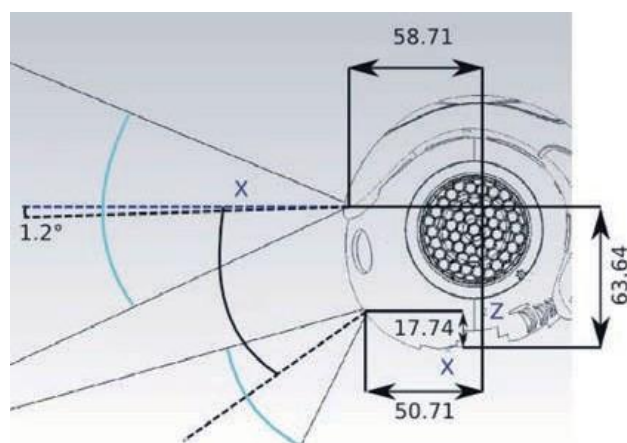

CONNECTIVITY

CONNECTION

Ethernet 1xRJ45 - 10/100/1000 BASE T

WIFI IEEE 802.11a/b/g/n

WPAN IEEE 802.15.1 4.0 (LE)
(Bluetooth)

SOFTWARE

Open Nao Embedded GNU/Linux Distribution based on Gentoo

Architecture 86

ENVIRONMENT SENSORS


INERTIAL UNIT

Gyrometer	1
Axis	3
Precision	5%
Angular speed	500°/s approx.

IMU	1
Axis	3
Precision	10%
Angular speed	2 g approx.

SONAR

Transmitters	2 on front
Receivers	2 on front
Frequency	40 kHz
Resolution	1 cm @50 cm
Detection Range	0.20 m to 0.80 m
Effective Cone	60°

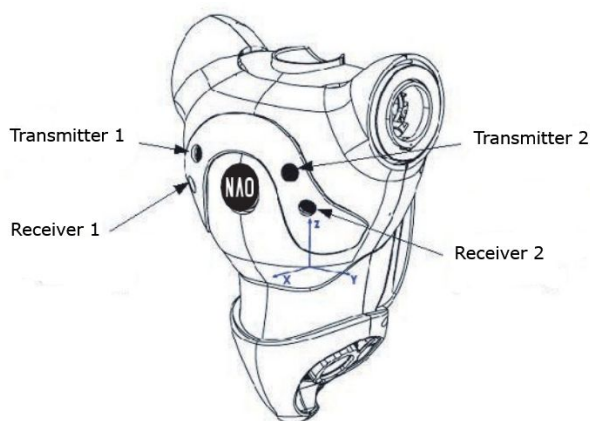

BUTTONS & SENSORS


Chest Button	✓
Foot Bumper	✓
Tactile Head	✓
Tactile Hand	✓

FORCE SENSITIVE RESISTORS (FSR)

Range 0 to 25 N

Location 4 in each foot

Sensitivity 40 g approx.

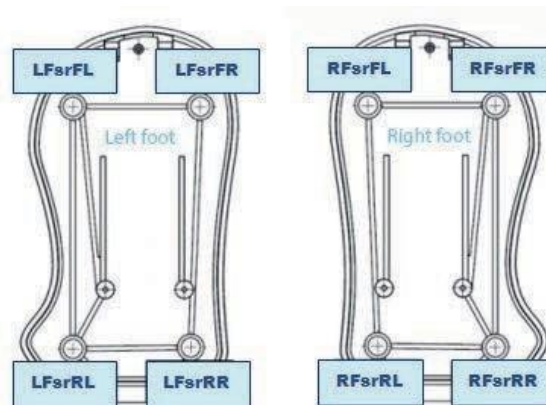

ENERGY

ROBOT BATTERY

Battery	Type	Lithium-Ion
Nominal voltage/capacity	21.6 V / 2.9 Ah	
Max charge voltage	25.2 V	
Recommended charge current	1.8 A	
Max charge / discharge current	2.1 A / 2.0 A	
Energy	62.5 Wh	
Charging duration	90 min	
Run time	60 min (Active use) 90 min (Normal use)	

BATTERY CHARGER

Input 100 to 240 VAC – 50/60 Hz – Max 1.2 A

Output 25.2 VDC – 2 A


MOTION

DEGREES OF FREEDOM

Head	2
Arm (in each)	5
Pelvis	1
Leg (in each)	5
Hand (in each)	1

POSITION OF MOTORS

		Gear	Motor type
Head joints	HeadYaw	150.27	3
	HeadPitch	173.22	3
Arm joints	ShoulderPitch	150.27	4
	ShoulderRoll	173.22	3
	ElbowYaw	150.27	3
	ElbowRoll	173.22	3
Arm joints	WristYaw	50.61	2
	Hand/ Fingers	36.24	2
Leg joints	HipYawPitch	201.3	1
	HipRoll	201.3	1
	HipPitch	130.85	5
	KneePitch	130.85	5
	AnklePitch	130.85	5
	AnkleRoll	201.3	1

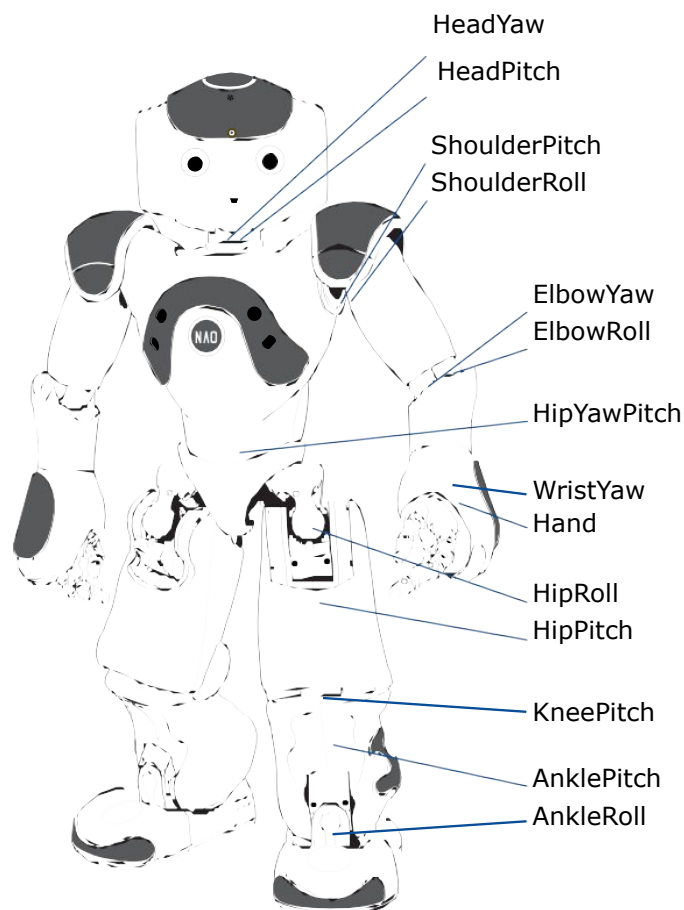

For details of type and gear ratio, see below.

MOTOR TYPE

	Motor type 1	Motor type 2	Motor type 3	Motor type 4	Motor type 5
Make	22NT82213P	17N88208E	16GT83210E	DCX 16S	22NT Z20
No load speed (rpm)	8700 ±10%	8400 ±12%	10700 ±10%	11400 ±10%	8700 ±10%
Stall torque (mNm)	65 ±8%	9.4 ±8%	14.3 ±8%	22.4 ±10%	65 ±10%
Continuous torque (mNm)	17.8 max	4.9 max	6.2 max	2.6 max	17.8 max

JOINT MOVEMENT ENCODERS

MRE 36
(Magnetic Rotary Using hall effect sensor
technology Encoder) Precision: 12 bits / 0.1°

MOTOR SPECIFICATIONS

Motor type Brush DC Coreless

Generation ROBOTS

Brand of **NGX** ROBOTICS



+33 (0)5 56 39 37 05



contact@generationrobots.com



1 rue Pierre-Georges Latécoère 33700 Mérignac, France

www.generationrobots.com

